

# Yamato

## CM-351 class

Blindstitch Machine

**YAMATO Blindstitch Machine Strongly Supports You with Its Stable Seam, Fine Quality Finish and High Versatility with Easy Adjustment.**



ISO9001:2008  
JQA CM6412

# Yamato

## CM-351 class

Blindstitch Machine

### Numbering on Model:

**CM-3 51/AT**



① Symbol of Series

② Class No.: 3 = Standard

③ Submodel by Application

④ Device(s)

AT : Automatic Thread Trimmer

T : Manual Thread Trimmer

AL : Automatic Presser Foot Lowering Device

TS\* : Automatic Thread Trimmer with Automatic  
Stitch Fastening Device

TF : Automatic Thread Fastening Device

TP : Thread Pull-off Device

### Specifications

LW x 6T 1	1	-	3.2~1.5		11-1.15 	-	10	-	3000	-

Except models without differential feed.

### Submodels

Model	Applications / Remarks	Skip Stitch Mechanism
CM-351	For tailoring sewing on light to medium weight fabrics.	—
CM-352	For tailoring (blindstitching) on light to medium weight fabrics.	O
CM-355	Exclusive for sewing bottom of trousers.	—
CM-356	Exclusive for lapel and collar padding.	—
CM-357	For blindstitching in the waist lines. With Automatic Depressing Plunger For medium weight fabrics.	—
CM-359	For backsewing on coat's backs.	—
CM-360	For patching on stocks, skirts, trailing parts, etc.	O
CM-364	For shorting operation on flare skirts, etc. with differential feed (Differential ratio 1:1~1:1.5)	O
CM-367	For blindstitching waist lining on trousers and other heavy weight material. With automatically depressed plunger. No thread pull over cross seam. The upper cloth layer only is being pierced.	—
CM-370	For making a folded belt loops. With trimming knives for cutting both edges of material.	—
CM-374	Pedal switch feeding control type machine, which enables sewing during sewing. With differential feed (Differential ratio 1:1~1:1.5)	O



**YAMATO SEWING MACHINE MFG. CO., LTD.**  
<http://www.yamato-sewing.com>


**DISTRIBUTED BY:**  
**Dunlap Sunbrand International, Inc.**  
208 Bradshaw Pike Ext.  
P.O. Box 751  
Hopkinsville, KY 42241-0751  
+1 (270) 886-1390 / (800) 626-9200  
**WWW.DSInternational.Com**  
**Info@DSInternational.Com**





## Unique threading for easy control thread tension.

This threading enables easy change of thread tension. The seam is fastened by moving Needle Thread Pull-off Eyelet (A) to the left, and loosened by moving it to the right.  
(Standard equipment)

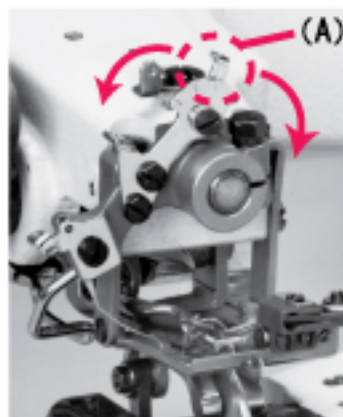

## Push button type stitch length adjuster

Stitch length can be adjusted by touching the push button on the arm bed with turning Pulley.




## Uniform seaming regardless of sewing speed.

Yamato's original thread tension controllers-big one and small one on the arm bed-ensure uniform seam while sewing at high or low speed.



## Stable seam ensured by Looper Adjusting Lever.

Looper Adjustment Lever (B) is equipped as standard for easy adjustment of looper position according to needle size.

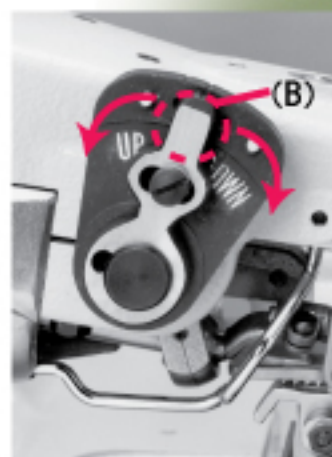

## Device for safe operation.

Finger Guard is equipped around the looper carrier for operator's safety and prevention from trouble such as entangled fabric around moving parts.




## Stitch Selector to change Skip to Non-skip stitch.

One touch change of skip stitch (to change one stitch and skip one) and non-skip stitch (to catch each stitch) by flip lever on stitch selector.  
(Equipped on: CM352, 360, 364 and 374 only)



## Felling depth control by Penetration Dial.

Felling depth is changed simply by turning Penetration Dial (E) to "MORE" or "LESS". In case felling depth should be needed beyond the movable range of the dial, remove the Screw (F): the turn of its inside screw offers the felling depth suitable for the material.



## Lever movement adjusts spring pressure.

The spring pressure of Cloth Retainer (C) is adjusted easily by Lever (D); available for blindstitching suitable for the material.  
Besides, it is easy to see the Ridge Forming Plate and Cloth Retainer and enables easy material handling.  
(Equipped on: CM351, 352, 364, and 374 only)

